


# 2000-40PD2 (oil-less)

Voltage	V	100	120	200	200	230	230	3x200	3x200	3x208	3x400	3x440
Frequency	Hz	50	60	50	60	50	60	50	60	60	50	60
Motor	HP	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	kW	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
Displacement <sup>3)</sup>	l/min	176	212	176	212	176	212	176	212	212	176	212
	CFM	6.22	7.49	6.22	7.49	6.22	7.49	6.22	7.49	7.49	6.22	7.49
FAD @ 8 bar <sup>3)</sup>	l/min	90	110	90	110	90	110	90	110	110	90	110
	CFM	3.18	3.88	3.18	3.88	3.18	3.88	3.18	3.88	3.88	3.18	3.88
Max. pressure <sup>1)</sup>	bar	8	8	8	8	8	8	8	8	8	8	8
	psi	120	120	120	120	120	120	120	120	120	120	120
Max. current	A	16.0	16.6	8.2	8.8	8.0	8.3			6.4	3.6	3.6
Tank size	litres	40	40	40	40	40	40	40	40	40	40	40
	gallon	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6
Weight	kg	65	65	65	65	65	65	65	65	65	65	65
	lbs	143	143	143	143	143	143	143	143	143	143	143
Noise level	dB(A)/1m	64	66	64	66	64	66	64	66	66	64	66
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%

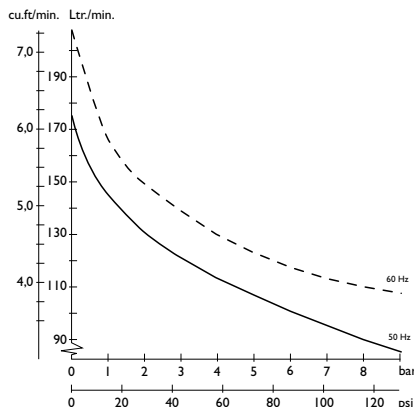

Dimensions (l x w x h)  
600 x 500 x 740 mm / 23<sup>5</sup>/<sub>8</sub> x 19<sup>5</sup>/<sub>8</sub> x 29<sup>1</sup>/<sub>8</sub> inch

- <sup>1)</sup> Higher pressure available upon request hence increased max. current  
<sup>3)</sup> Displacement is reduced by approx. 18-20% on units with dryer (D). Min. pressure required to operate dryer: 6 bar.

Technical modifications reserved

**JUN-AIR**®

E-mail: [info@jun-air.dk](mailto:info@jun-air.dk)  
Internet: [www.jun-air.com](http://www.jun-air.com)

