


# OFI 202-40MD3 (oil-less)

Voltage	V	230	230	3x400	3x400														
Frequency	Hz	50	60	50	60														
Motor	HP	2.0	2.0	2.0	2.0														
	kW	1.47	1.47	1.47	1.47														
Displacement	l/min	290	328	290	328														
	CFM	10.24	11.58	10.24	11.58														
FAD @ 8 bar/120 psi <sup>1)</sup>	l/min	130	146	130	146														
	CFM	4.59	5.16	4.59	5.16														
Max pressure <sup>2)</sup>	bar	8	8	8	8														
	psi	120	120	120	120														
Max. current	A	8	9	5	5														
Tank size	litres	40	40	40	40														
	gallon	10.6	10.6	10.6	10.6														
Weight	kg	121	121	121	121														
	lbs	267	267	267	267														
Noise level	db(A)	60	63	60	63														
Thermal protection		Yes	Yes	Yes	Yes														
Duty cycle		100%	100%	100%	100%														

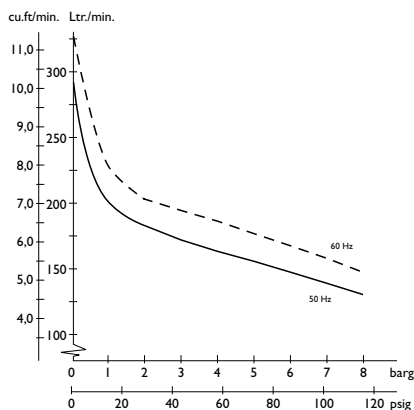

Dimensions (l x w x h)  
661 x 643 x 856 mm / 26 x 25<sup>3</sup>/<sub>8</sub> x 33<sup>6</sup>/<sub>8</sub> inch

<sup>1)</sup> FAD is reduced by 18-20% on units with dryer.  
Minimum pressure required to operate: 6 bar/90 psi

<sup>2)</sup> Higher pressure available upon request

Technical modifications reserved

**JUN-AIR** 

**IDEX**  
IDEX CORPORATION

E-mail: [info@jun-air.dk](mailto:info@jun-air.dk)  
Internet: [www.jun-air.com](http://www.jun-air.com)

